

Amphibious Swamp Buggy




- Swamp Clearing - Oil and Gas Pipeline
- Forest Removal - Wetland Access, Property Development
- Deepening Waterways - Rivers, Canals, lakes, shorelines
- Maintenance and Environmental Cleanup



EIK[®]

Official Dealer for Africa

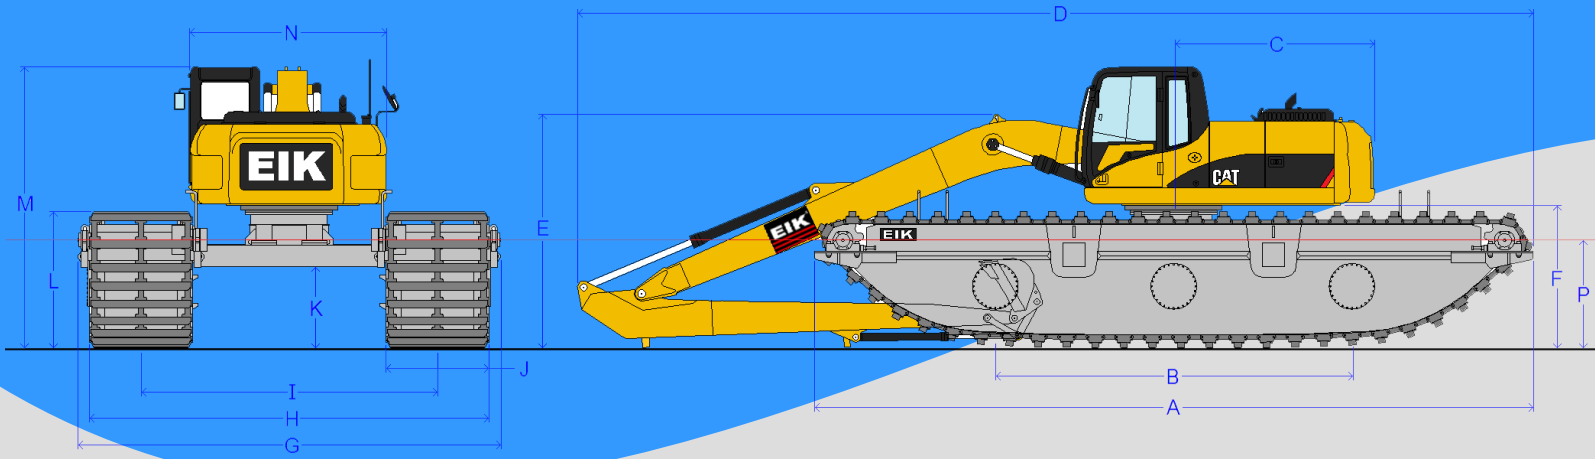

Dim (m)	Description	Amphibious Undercarriage Models		
		AM200	AM250	AM300
		For 20 - 22 ton Class Excavator	For 24 - 27 ton Class Excavator	For 28 - 30 ton Class Excavator
A	Max. Track Length	9.65	9.65	11.10
B	Track Length On Ground	4.30	4.30	5.70
C	Rear Upper Structure Length	2.68	3.00	3.12
D	Overall Length	13.12	14.40	15.60
E	Height of Boom	3.23	3.70	4.10
F	Counterweight Clearance	2.21	2.21	2.35
G	Overall Width, min/max (Outwardly, extendable)	5.29 / 6.09	5.87 / 6.67	6.20 / 7.00
H	Undercarriage Width, min/max	5.00 / 5.80	5.58 / 6.38	5.90 / 6.70
I	Track Gauge, min/max	3.38 / 4.18	3.66 / 4.46	3.98 / 4.78
J	Track Cleat Width	1.62	1.92	1.92
K	Min. Ground Clearance	1.29	1.29	1.15
L	Track Height	2.05	2.05	2.05
M	Overall Cabin Height	4.14	4.20	4.23
N	Upper Structure Overall Width	2.71	2.85	2.98



- Engineered options :**
- Supplementary pontoons
 - Spud System
 - Expandable Tracks
 - Polymer Tracks




PIONEER HEADQUARTERS

Jacksonville, Florida (USA)
+1 904 732 2151
sales@pioneerjax.com

www.pioneerjax.com

